

RTEC Ironlabel-P9522™



- IT 资产, 金属托
- 盘气瓶和管道
- 曲面物体
- 支持RFID打印机

环境参数

操作温度 -30°C to +85°C

环境温度 -30°C to +85°C

IP等级 IP54


冲击振动 MIL STD 810-F

CE approved

认证 RoHS approved

ATEX/IECEX certified

质保 1年

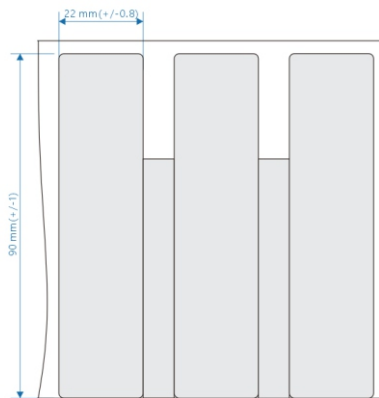

机械参数

标签材质	泡棉
表面材质	高品质PET标签
尺寸	22 x 95 x 1.25 mm
重量	1.8 g
安装方式	工业级粘胶
颜色	白色 (标准)
盘间距	28 (+/-0.8) mm
胶芯内径	76.2 mm
包装	500 pcs/reel
支持打印机	Zebra RZ400/R110Xi4, SATO CL4NX,Toshiba SX-5

射频参数

空中协议	EPC Global Class 1 Gen2 ISO18000-6C
操作频率	UHF 866-868 MHz (ETSI) UHF 902-928 MHz (FCC)
环境兼容	金属上最优
读取距离	Up to 12 m (金属) Up to 6 m (非金属)
极化	线极化
芯片	Impinj R6-P
储存	EPC 128bit TID 96bit User 32bit

*Read ranges indicated in this datasheet is achieved by using our standard testing methodology. Actual performance will be different if different reader hardware and output power is applied.

订购信息

Product #	RTEC3100X01
Product Name	RTEC Ironlabel-P9522 ETSI
Product #	RTEC3100X02
Product Name	RTEC Ironlabel-P9522 FCC

RTEC Singapore

57 Mohamed Sultan Road
#01-05 Sultan Link
Singapore 238997

RTEC China

L3 Enterprise accelerator B,
Scientific innovation District,
MianYang City
Sichuan, China 621000

